


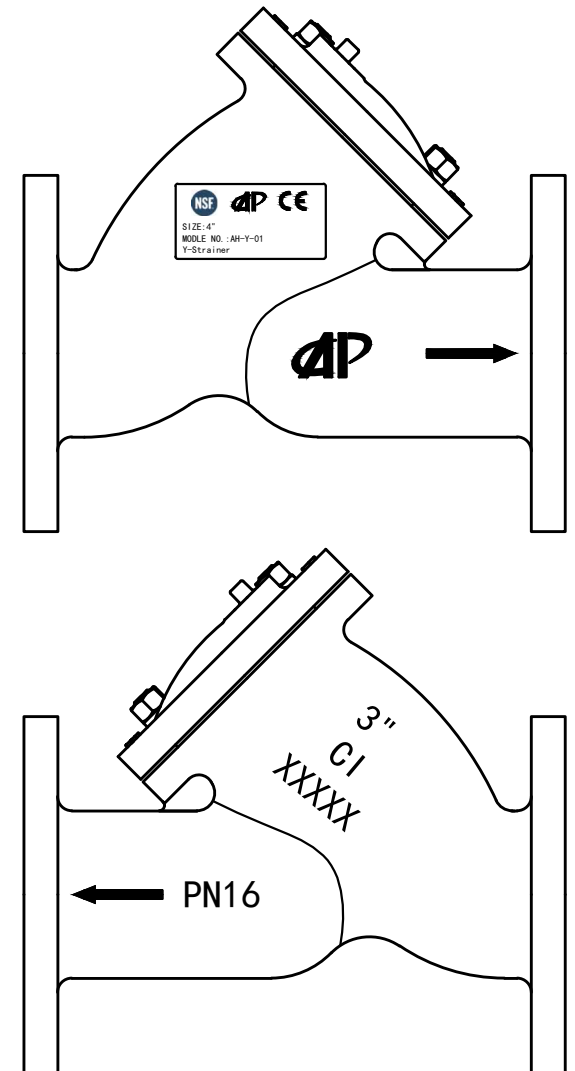

DN	L	B	øC	D	PN16			AS2129 TABLE D		
					D	K	n-ød	D	K	n-ød
80	285	140	90	1 1/2"	200	160	8-18	185	146.1	4-ø18
100	300	159	110	1 1/2"	220	180	8-18	216	177.8	4-ø18
150	395	273	167	1 1/2"	285	240	8-22	280	235	8-ø18
200	495	332	226	1 1/2"	340	295	12-22	336	292.1	8-ø18

1. Working pressure :PN10/PN16.
2. Face to face dimensions:
Requirement of the client
3. Fitting between flanges:
EN1092-2 PN16. BS10 TABLE D
4. Closing tightness according to API598.

6	Plug	Malleable iron						Y-strainer	AH-Y-01		
5	Screw	A3							Version No.	WEIGHT	SCALE
4	Gasket	EPDM/NBR	MARK	INDEX	FILE NO.	SIGN	DATE				
3	Screen	SS304/SS316	DESIGNED						01		
2	Cover	GG25/GGG40	CHECKED						PAGE		PAGES
1	Body	GG25/GGG40	CRAFT								
			APPROVED								

A

B

C



D

A

B

C

D

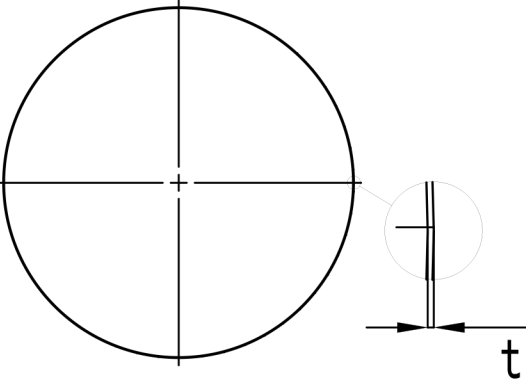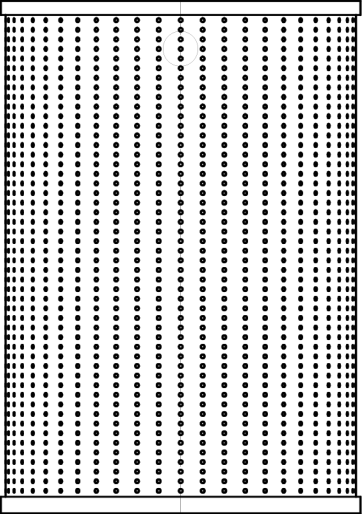

SIZE	t thickness of creen
DN50	0. 25
DN65	0. 25
DN80	0. 25
DN100	0. 25
DN125	1
DN150	1
DN200	1
DN250	1
DN300	1

APC			screen of Y strainer	
design		date 2018/05/05	drawing number	
check			MH-Y-FLT-004	
control		meterial	unit <u>mm</u>	
approve			revision <u>B</u>	
revise				